


SMT TENSION PACKERS

Model SMT Tension Packer is a retrievable, tension set packer, designed to hold pressure from below. This economical tension packer is for shallow wells where sufficient setdown weight is not available to utilize a set down packer. This packer can be used in water flood, oil production or treating applications. They are available for 4" through 13 3/8" casings.

Features:

- Sets securely in any hardness casing, including premium grades
- Compact, short, easy to transport and run
- Bore is larger than tubing drift diameter
- Easy to operate J-Slot control
- Rocker type slips
- One piece packing
- Three release methods; normal release, Shear release and safety joint top sub
- Parts are interchangeable with other manufacturers

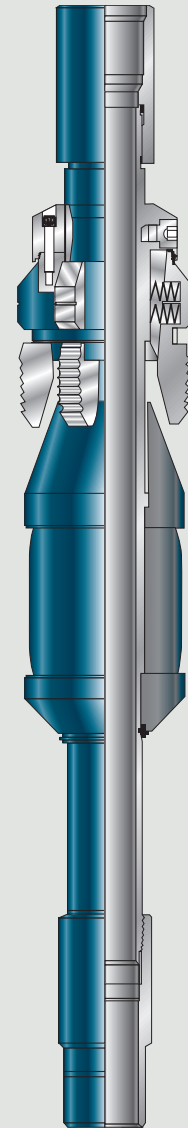

SPECIFICATIONS

Part number	Casing OD (in)	Casing Wt (lbs/ft)	Setting range		Tool OD (in)	Tool ID (in)	Connection thread		
			Min(in)	Max(in)					
D44-0450-100	4	9.5-11.6	3.428	3.548	3.188	1.937	2 3/8"-8RD EU		
D44-0450-200	4 1/2	12.6-15.1	3.754	3.826	3.609				
D44-0500-100	4 1/2	9.5-13.5	3.91	4.09	3.771				
D44-0500-200	5	15-18	4.25	4.408	4.125				
D44-0500-300	5	11.5-15	4.408	4.56	4.25				
	5 1/2	26							
D44-0550-120	5 1/2	20-23	4.625	4.778	4.5			1.978	2 3/8"-8RD EU
D44-0550-140	5 1/2	15.5-20	4.778	4.95	4.641				
D44-0550-200	5 1/2	13-15.5	4.95	5.19	4.781				
	5 3/4	22.5							
	6	26							
D44-0550-300	6	20-23	5.191	5.39	5.062	2.416	2 7/8"-8RD EU		
D44-0550-400	6	15-18	5.391	5.56	5.156				
D44-0550-540	6 5/8	28-32	5.61	5.791	5.484				
D44-0700-120	6 5/8	24	5.83	5.937	5.656				
	7	38							
D44-0700-140	6 5/8	17-20	5.938	6.135	5.812				
	7	32-35							
D44-0700-220	7	26-29	6.136	6.276	5.968			3	3 1/2"-8RD EU
D44-0700-240	7	20-26	6.276	6.456	6.078				
D44-0700-320	7	17-20	6.456	6.578	6.266				
D44-0700-340	7 5/8	33.7-39	6.579	6.797	6.453				
D44-0700-420	7 5/8	24-29.7	6.798	7.025	6.672				
D44-0700-440	7 5/8	20-24	7.025	7.125	6.812				
D44-0862-120	8 5/8	40-49	7.511	7.725	7.312				
D44-0862-140	8 5/8	32-40	7.725	7.921	7.531				
D44-0862-200	8 5/8	20-28	7.922	8.191	7.781				
D44-0962-120	9 5/8	47-53.5	8.535	8.681	8.218	4	4 1/2"-8RD EU		
D44-0962-140	9 5/8	40-47	8.681	8.835	8.437				
D44-0962-200	9 5/8	29.3-36	8.836	9.063	8.593				
D44-1075-100	10 3/4	32.7-55.5	9.625	10.192	9.5				
D44-1075-200	11 3/4	38-60	10.605	11.2	10.5				
D44-1275-100	12 3/4	48-53	11.75	12.3	11.625				
D44-1338-200	13 3/8	48-72	12.3	12.715	12				